




HELICABLE™ Hoisting Grips for the safe vertical installation of Coaxial Cable.

FEATURES

• Installation

HELICABLE™ hoisting grips distribute lifting forces over a length of cable avoid crushing, and are used to absorb additional strain from vibration, expansion, contraction and flexing.

HELICABLE™ open lace up hoisting grips allow for installation of cable runs that are already terminated with connectors, and also where the connector is installed after hoisting.

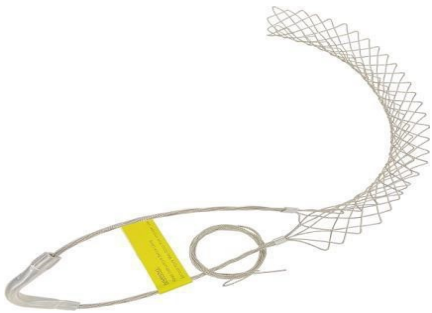

HOIST-318-O for
3-1/8" HELICABLE™ HJA318-50-A
Air-Dielectric Coaxial Cable

Technical Details

GENERAL SPECIFICATIONS

Product Line		Coaxial Cable Accessories
Product Type		Hoisting Grip
Transmission Line Type		HJA318-50A
Cable Type		Air-Dielectric Coaxial Cable
Configuration		1 Loop Attachment
Style		Lace Up, Open

MECHANICAL SPECIFICATION

Cable Size Range	mm (in)	88.9 - 101.3 (3.5 - 4)
Mesh Length	mm (in)	965.2 (38)
Eye Length	mm (in)	508 (20)
Weave Line Length	mm (in)	4000 (157.5)
Safe Working Load	kg (lbs)	590 (1300)
Maximum Spacing Interval	m (ft)	61 (200)
Mesh Material		Stainless Steel
Warning Label		Yellow Mylar

PACKING INFORMATION

Packing Quantity	pcs	1, in plastic bag
Weight, gross	kg (lbs)	0.6 (1.32)